

09-07-00

A

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.  
10655.9200

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**SYSTEM AND METHOD FOR AUTHENTICATING A WEB PAGE**

and invented by:

**Elliott Glazer, Dirk White, David Armes, Fred Bishop and Michael Barrett**JC564 U.S. PTO  
09/06/00  
09/06/00If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 24 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☒ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
10655.9200

Total Pages in this Submission

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal                      Number of Sheets \_\_\_\_\_
- b. ☒ Informal                      Number of Sheets 12
4. ☐ Oath or Declaration
- a. ☐ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☐ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class                      ☐ Express Mail *(Specify Label No.):* EL426615047US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
10655.9200

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*


16. ☐ Additional Enclosures *(please identify below):*

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	19	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	4	- 3 =	1	x \$78.00	\$78.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$768.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-2814** as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of **\$768.00** as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

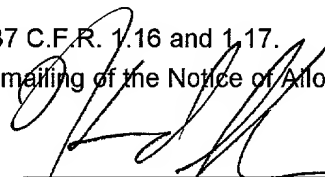

Signature

**Howard I. Sobelman, Reg. No. 39,028**  
**Snell & Wilmer L.L.P.**  
**One Arizona Center**  
**400 E. Van Buren**  
**Phoenix, AZ 85004-2202**  
**(602) 382-6228**

Dated: September 6, 2000

cc:

## SYSTEM AND METHOD FOR AUTHENTICATING A WEB PAGE

### INVENTORS:

5 Elliott Glazer  
Dirk White  
David Armes  
Fred Bishop  
Michael Barrett

### CROSS REFERENCE TO RELATED APPLICATIONS

10 This application claims the benefit of U.S. Provisional Application No. 60/153,004, filed September 9, 2000, the entire contents of which is hereby incorporated by reference.

### FIELD OF THE INVENTION

15 The present invention relates generally to computer security, and more particularly, to systems and methods for authenticating a web page.

### BACKGROUND OF THE INVENTION

Web pages often include icons, such as, corporate logos, patterns, characters, symbols or other indicators, that a user associates with a particular offering in the real world. A trust or good will is often associated with the recognition of a given set of icons. These icons are implemented, for example, as bitmaps, but unfortunately, these bitmaps can be copied and used to defraud a prospective customer. Additionally, customers rely on the accuracy of a URL of a web page. However, it is relatively easy for a "fraudster" to register a URL that is like the one the user is expecting, but is not quite the same. For example, 20 "www.bigbank.com" vs. "www.blgbank.com" (with an "l" instead of an "i"). Thus, a user may retrieve an unwanted webpage that appears authentic. Therefore, the user may not always be confident that the web page being viewed is authentic and the true owner of a web page may be uncertain.

0030604609980

In addition to a user's lack of confidence in the true owner of a web page, there currently exists a problem (either real or perceived) in the transport of UserIDs/Passwords across the Internet. While most sites provide security, for example by using a secure protocol such as Secure Hypertext Transfer Protocol (HTTPS) for sensitive data, most consumers are complacent about checking for this security. Thus, a need exists for a system and method that allow a page to be authenticated so that a user feels secure in the authenticity of pages displayed from Internet sites.

### SUMMARY OF THE INVENTION

10 In exemplary embodiments of the invention, a user requests a web page from a web site using a web browser. The web server receives the request, retrieves the web page and forwards it to an authentication server. The authentication server inserts an authenticity key into the web page, then the page (including the authenticity key) is returned to the user. If the page includes an authenticity key, the authenticity is verified at the user's computer because the user computer includes logic (e.g., software) to verify the authenticity.

15 In exemplary embodiments, the authenticity verification software is a browser plug-in and is configured by the user after it is downloaded to the user's computer. During the user configuration process, the user defines an authenticity stamp which determines the format of an authenticated page. In alternative embodiments, the user defines a non-authenticity stamp which will appear on non-authenticated pages.

### BRIEF DESCRIPTION OF THE DRAWINGS

20 The above and other features and advantages of the present invention are hereinafter described in the following detailed description of illustrative embodiments to be read in conjunction with the accompanying drawing figures, wherein like reference numerals are used to identify the same or similar parts in the similar views, and:

**Figure 1** is an exemplary web page that has not been authenticated;

**Figure 2** is the exemplary web page of **Figure 1** that has been authenticated in accordance with the present invention;

**Figure 3** is the exemplary web page of **Figure 1** that has been authenticated using an alternative embodiment of the present invention;

5        **Figure 4** is a block diagram of an exemplary system configuration suitable for implementing the present invention;

**Figure 5** is a message sequence diagram for performing page authentication in accordance with the present invention;

10       **Figures 6A and 6B** are a flow diagram illustrating exemplary logic performed by a user computer for performing authentication in accordance with the present invention;

**Figure 7** is a flow diagram illustrating exemplary logic for loading an authentication module in accordance with the present invention;

15       **Figure 8** is a flow diagram illustrating exemplary logic for verifying authenticity and displaying an authenticated page in accordance with the present invention;

**Figure 9** is a flow diagram illustrating exemplary logic performed by a web server for performing authentication in accordance with the present invention;

20       **Figure 10** is a flow diagram illustrating exemplary logic performed by an authentication server in accordance with the present invention; and

**Figure 11** is an exemplary authenticity key.

## DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

The present invention provides for an icon with an additional level of functionality that allows a user to validate that current information (e.g., a web  
25       page) originates from the true owner of the icon and is not merely a copy. In various exemplary embodiments of the invention, a hierarchy of validations exists which allow not only for the validation of an individual icon, but also for the validation of screens and Uniform Resource Locators (URLs). Unlike Secure Sockets Layer (SSL) or other "security session" protocols, the present invention  
30       validates aspects of the screen display independent of the communications

channel between the user and the web site (however, security session protocols may be used in addition to the present invention). The validation is performed using only information that the true owner of the icon can possess.

**Figure 1** is an example of a simple web page. The web page 50 includes  
5 a title 52, several hyperlinks 54A, 54B, 54C and 54D, some textual  
information 56 and two graphical images 58A and 58B.

A web page that has been authenticated using the present invention will include all of the information in the same format as the non-authenticated page. As shown in **Figure 2**, in addition to the information that would normally be  
10 displayed, an authenticated page includes an authenticity stamp 60 in which the user can specify the appearance of the authenticity stamp. For example, the user of the example shown in **Figure 2** defined the authenticity stamps to be a diamond shape which includes text (bold and italicized) that states "JOE'S SEAL OF APPROVAL." It will be appreciated that an unlimited number of variations of  
15 an authenticity stamp are possible. A user can configure the stamp to be graphics only, text only or a combination thereof. The user also specifies the color and other attributes of the stamp, for example, a blinking stamp. The user also specifies the location of the stamp, e.g., bottom right corner of the web page, pop-up dialog box, etc. In exemplary embodiments, the authenticity stamp  
20 can be audio instead of or in addition to visual. In alternative embodiments, a non-authenticated page is stamped and an authenticated page is not stamped. For example, the stamp is configured to be a red, flashing icon that reads "PAGE NOT AUTHENTICATED" in the upper right-hand corner, while a page that is authenticated does not include this stamp. In alternative examples, the user can  
25 define both an authenticity stamp and a non-authenticity stamp.

**Figure 3** illustrates an alternative embodiment wherein each graphical image includes an embedded authenticity stamp 62A and 62B. In the example illustrated in **Figure 3**, each graphical element has an authenticity stamp containing the text "A-OKAY" embedded in the graphical image. In exemplary  
30 embodiments, the authenticity stamp is defined by the user. In other embodiments, the authenticity stamp is defined by the owner of the page being

displayed (e.g., the web server). In such embodiments, the stamp can include the name of the trusted entity (i.e., the true owner of the page).

**Figure 4** is a block diagram of an exemplary environment 100 suitable for implementing the present invention. The system 100 includes one or more  
5 clients (e.g., users) 110 that communicate with one or more servers (e.g., web servers) 120. The users 110 can use any type of computing device that includes a display device, for example, a Personal Computer. It will be appreciated that other computing devices can be used, for example, a Personal Digital Assistant (PDA), a hand-held computing device, a cellular telephone, etc. The web server  
10 can be any site, for example a commercial web site, such as a merchant site, a government site, an educational site, etc. The user 110 establishes a connection to the web server 120 via a network 130, such as the Internet. The user 110 and web server 120 can communicate using a secure protocol (e.g., HTTPS) or a non-secure protocol (e.g., HTTP). The user 110 requests information from the  
15 web server 120, and in exemplary embodiments, the information is communicated using web pages, for example using HyperText Markup Language (HTML). The web pages are displayed on the user's computer 110, for example, using a browser, such as, Netscape Communicator available from the Netscape Corporation of Mountain View, California or Internet Explorer available from the  
20 Microsoft Corporation of Redmond, Washington. Prior to sending the requested web page to user 110, web server 120 submits the information to authentication server 140 where authenticating information is added. The information which includes the authenticating information is returned to the web server 120 which then sends the web page including the authentication information to the  
25 user 110.

In various exemplary embodiments, the authentication server 140 communicates with a security engine 150, for example to verify UserID/Password logons or single use passwords or identifiers. In exemplary embodiments, the security engine 150 is a commercially available security engine, such a,  
30 Siteminder available from Netegrity Corporation, of Waltham, Massachusetts.



The examples illustrated and described herein are directed to exemplary embodiments in which a user utilizes a web browser to request web pages from a web server. However, it will be appreciated that various embodiments are possible wherein a client (e.g., web browser) requests content (e.g., a web page) from a server (e.g., a web server). The present invention allows the server to provide the client with assurance as to the authenticity of the content (e.g., assure the client as to the true owner of the content).

**Figure 5** is a message sequence diagram illustrating exemplary communications among various components to assure a user of the authenticity of a page. User 110 includes a web browser 112 and a plug-in 114. A user requests a page 180, but the user (e.g., user computer) 110 has no knowledge that the page requested is "special" (e.g., is subject to page authentication). Thus, the page request 180 is a normal page request (e.g., a HTTP or HTTPS request for a page).

The web server 120 receiving the page request 180 determines whether the request is for an authenticated page. If the page is to be authenticated, the page is dynamically signed with a private key and additional information, such as a salt with a time stamp is also included as described in further detail later. The signed page is returned with a special authenticated page MIME type and returned to the web browser 112. Based on the MIME type, the web browser activates the appropriate plug-in 114.

The plug-in 114 uses a public key to verify the signature, and upon verification of the signature, the plug-in can validate the authenticity of the page. The plug-in 114 requests the user's preferences key 186 so that the page can be displayed with an authenticity stamp. In exemplary embodiments, the request for preferences key includes a shared secret and is encrypted with the public key and salt. Upon receipt of the request for preferences key 186, the web server 120 decrypts the request using the private key, validates the shared secret and encrypts the preferences key with the private key, shared secret and salt from the request 186. The encrypted preferences key is then returned to the plug-in 114.

202416.6

The plug-in 114 reads the preferences file and decrypts it using the preferences key from the web server 120. In exemplary embodiments, the preferences file is stored on the user's 110 file system. However, the location of the file is not readily known to the plug-in 114. Thus, the plug-in 114 must get the preferences key to determine the location of the preferences file. The plug-in 114 reads the preferences file to determine the authenticity stamp and how it is to be displayed. The page is then displayed with the user's preferred authenticity stamp 190.

**Figures 6A–10** illustrate exemplary logic for performing page authentication in accordance with the present invention. The flow diagrams illustrate in further detail the logic illustrated in the message sequence diagram of **Figure 5**. In addition to authenticating a page, the present invention provides for additional security wherein a UserID/Password are encrypted with the public key to prevent “man in the middle” attacks. **Figures 6A-8** illustrate exemplary logic performed by a user computer 110 as described below. **Figure 9** illustrates exemplary logic performed by a web server 120 as described below. **Figure 10** illustrates exemplary logic performed by an authentication server 140 as described below. It will be appreciated that various configurations are possible. For example, the logic of the authentication server 140 can be combined with the logic of the web server 120.

**Figures 6A and 6B** are a flow diagram illustrating exemplary logic performed by a user 110 for performing authentication in accordance with the present invention. The logic described herein is directed to web pages, however it will be appreciated that the information requested can be of various formats. The logic of **Figure 6A** moves from a start block to block 200 to wait for a page request. It will be appreciated that a page request is known in the art, for example, a user enters a Uniform Resource Locator (URL) or clicks on a hyperlink. The logic then moves to block 201 where a received page request is sent to a web Server 120 to retrieve the requested page. The logic then moves to block 202 where the user (e.g., the user's browser) waits for the requested page. The logic of retrieving and formatting the requested page is described

below with reference to **Figures 9 and 10**. When the requested page is received, the logic moves to block 204 where the page is read.

After a page is read, the logic moves to decision block 205 where a test is made to determine if a UserID/Password is required. It will be appreciated that a  
5 UserID/Password may be required for both pages requiring authentication and pages not requiring authentication. If a UserID/Password is required, the logic moves to block 206 where a UserID/Password is obtained. If a UserID/Password is required, a suitable logon screen is displayed on the user's computer. The  
10 UserID/Password entry display can be of varying formats, for example, a web page or a pop-up dialog box. Upon entry of a UserID/Password, the user indicates completion (for example, by pressing an "OK" or "Submit" button). Upon completion of the logon, the logic moves to block 207 where the UserID/Password is encrypted to prevent man in the middle attacks. The logic then moves to block 208 where the encrypted UserID/Password is sent to the  
15 web Server.

If a UserID/Password is not required, the logic moves to decision block 209 (**Figure 6B**) where a test is made to determine if authentication is required. In exemplary embodiments, an authenticity key will be hidden in any page that should be authenticated. In order to determine if the page should be  
20 authenticated, the page source is read to determine if an authenticity key is included in the page. If authentication is not required, the logic moves to block 210 where the non-authenticated page is displayed. A non-authenticated page is a traditional web page (i.e., the way the web page would be displayed without the authentication of the present invention, such as the example shown in  
25 **Figure 1**).

If authentication is required (yes in decision block 209), the logic moves to decision block 211 where a test is made to determine if the authentication module is loaded. In exemplary embodiments, the authentication module is a plug-in module for the web browser. In exemplary embodiments, if the  
30 authentication module has not been loaded, a message will be displayed. For example, "This page protected by AuthentiPage, to get a free copy, go to

Authentipage.com.” Alternatively, the message may ask the user if a download of the authentication module is desired. If the authentication module is not loaded, the logic moves to decision block 214 where a test is made to determine if the authentication module should be loaded. If the authentication module is not

5 to be loaded, the logic moves to block 218 where the page is displayed without authentication. In exemplary embodiments, the user will be notified that the page could not be authenticated, for example via a pop-up window displaying a warning message. In alternative embodiments, the user defines a non-authenticity stamp which is displayed for a page that has not been authenticated.

10 If the authentication module is to be loaded (yes in decision block 214), the logic moves to block 216 where the authentication module is loaded as shown in **Figure 7** and described next. If a download of the authentication module is desired, the user may be automatically redirected to the download site.

**Figure 7** illustrates exemplary logic for loading an authentication module

15 (block 216 of **Figure 6B**). The logic of **Figure 7** moves from a start block to block 300 where the authentication module (e.g., plug-in) is downloaded. The download is accomplished using techniques known in the art. After the authentication module is downloaded to the user’s computer, the logic moves to block 302 where the authentication module is configured. As part of the

20 configuration process, an authenticity stamp is defined by the user. This authenticity stamp will be displayed whenever an authenticated page is loaded. The stamp can take several forms, for example, a user-selected keyword, color, etc. Preferably, the determination of the look of the authenticity stamp is under complete control of the user. Preferably, the user is also able to determine

25 where the stamp will be displayed, for example in a separate pop-up box or in a selected area of the web page. By requiring the user to configure the visual qualities of the stamp, the possibility of a counterfeit stamp being displayed is reduced. The user will expect to see his or her stamp and will begin to associate the stamp with security. It will be appreciated that while the stamp is defined in

30 terms of visual qualities herein, embodiments of the invention can include defining the stamp in other ways, for example, by an audio indication specified by

the user. After the authentication module has been configured, the logic of **Figure 7** ends and processing returns to **Figure 6B**.

Returning to **Figure 6B**, after the authentication module is loaded (block 216), or if it has been determined that the authentication module is already loaded (yes in decision block 211), the logic moves to block 212 to verify the authenticity of the page and display the page, as shown in detail in **Figure 8** and described next.

**Figure 8** illustrates exemplary logic for verifying the authenticity of a page and displaying the page. The logic of **Figure 8** moves from a start block to block 400 where the authenticity of the page is verified. Many algorithms can be used to verify the authenticity. For example, the trusted server that generates the authenticity key can encrypt the authenticity key with a private key. The user can then decrypt the authenticity key using a public key. Using this method, no certificate is required and no interaction is required by the user. Other algorithms can be used, some of which may require a certificate and/or user interaction. Unless the page contains confidential information, the authentication of pages should not require any additional security or encryption. The authentication of a page can be employed on any page, for example, marketing data, purchase information, etc., to prove the page's authenticity. In general, authentication of pages will not require additional security or encryption. However, if additional security is desired, page authentication performed in accordance with the present invention can be used in combination with other known or future security measures, for example, in conjunction with a secure protocol, such as HTTPS, along with the requirement for a UserID and a password, etc. If the authentication is successful (yes in decision block 402), the logic moves to block 404 where the page is displayed with the authenticity stamp as defined by the user during the configuration process described above. If the authentication fails (no in decision block 402), the logic moves to block 406 where the unsuccessfully authenticated page is displayed. In exemplary embodiments, an indication of the authentication failure is provided, for example a warning message may be displayed. For example, a flashing error message, such as

“PAGE NOT AUTHENTICATED” can be displayed in the location where the authenticity stamp would normally be displayed. After the page is displayed (either as an authenticated page in block 404 or as an unsuccessfully authenticated page in block 406), the logic of **Figure 8** ends and processing  
5 returns to **Figure 6B**.

Returning to **Figure 6B**, after a page has been displayed (block 210, 212 or 218) or a UserID/Password request has been processed, the logic moves to decision block 220 (**Figure 6A**) where a test is made to determine if it is time to exit. For example, if the user selects an “Exit” option form a web browser menu,  
10 it is time to exit. If it is not time to exit, the logic returns to block 200 to wait for the user’s next page request. The logic of blocks 200-220 is repeated until it is time to exit. It will be appreciated that in alternative embodiments of the invention requests other than those shown and described herein may also be processed. When it is time to exit, the logic of **Figure 6A** ends.

15 **Figure 9** is a flow diagram illustrating exemplary logic performed by a web server 120 for performing authentication in accordance with the present invention. The logic of **Figure 9** moves from a start block to block 500 where the web server waits for a request. In exemplary embodiments, while the web server is waiting for a request other requests continue to be serviced (e.g., receiving  
20 and processing page requests). When a request is received, the logic moves to decision block 501 where a test is made to determine if the request is a request for validation of a UserID/Password. If so, the logic moves to block 502 where the received UserID/Password (sent in block 108 of **Figure 6A**) is forwarded to the authentication server 140.

25 If the request is not a request for verification of a UserID/Password, the logic moves to decision block 504 where a test is made to determine if the request is a page request. If so, the logic moves to block 505 where the page request is read. The logic then moves to block 506 where the requested page is retrieved. Next, the logic moves to block 507 where the requested page is  
30 forwarded to an authentication server 140. The logic then moves to block 508 where the web server waits for the authenticated page to be returned from the

authentication server. In exemplary embodiments, while the web server is waiting for an authenticated page, other processing can be performed, for example, page requests can be received and processed. When an authenticated page is received, the logic moves to block 510 where the authenticated page is returned to the user that requested the page.

If the request is not a request to verify a UserID/Password (no in decision block 501) or a page request (no in decision block 504), the request is another request, which is processed in block 512. Other requests which may be processed by a web Server are not described herein.

After the request (e.g., request for verification of UserID/Password, page request or other request) has been processed, the logic moves to decision block 514 where a test is made to determine if it is time to exit. The logic of blocks 500-514 is repeated until it is time to exit (e.g., shut down the web server). When it is time to exit, the logic of **Figure 9** ends.

**Figure 10** is a flow diagram illustrating exemplary logic performed by an authentication server 140 for performing authentication in accordance with the present invention. The logic of **Figure 10** moves from a start block to block 600 where the authentication server waits for an authentication request. When an authentication request is received, the logic moves to decision block 601 to determine if the request is a request to decrypt a UserID/Password. If so, the logic moves to block 602 where the UserID/Password is decrypted. The logic then moves to block 604 where the decrypted UserID/Password is forwarded to a security engine for verification. In exemplary embodiments, the security engine is an existing security engine, such as a DSS Security Engine. The Security Engine verifies the UserID/Password and forwards the verification as appropriate. For example, if the UserID is not valid, a message will be displayed on the user's computer. Because security engines are known in the art, the logic employed by the security engine is not discussed further herein.

If the request is not a request to decrypt a UserID/Password, the logic moves to decision block 606 where a test is made to determine if the request is an authentication request. If so, the logic moves to block 608 where the

authentication server generates an authenticity key. Details for an exemplary authenticity key are described below. The logic of **Figure 10** then moves to block 610 where the authenticity key is inserted into the web page. An exemplary authenticity key is shown in **Figure 12**. Next, the logic moves to block 612 where the page which includes the authenticity key is returned to the web server.

While the exemplary embodiments only include processing of requests for encryption/decryption or authenticating a page, it will be appreciated that alternative embodiments may process other requests. After a request is processed (e.g., a UserID/Password is decrypted or a page is authenticated), the logic moves to decision block 616 where a test is made to determine if it is time to exit. The logic of blocks 600-616 is repeated until it is time to exit (e.g., shut down the authentication server). When it is time to exit, the logic of **Figure 10** ends.

In alternative embodiments, there is no authentication server. Rather, graphical images include a hidden identifier identifying the true owner, as well as a cryptographic signature to ensure that the graphical image cannot be tampered with by a counterfeiter. In various embodiments, the identification is a portion of a URL that is encrypted, such as "bigbank.com". Those skilled in the art will recognize this as a second-level domain name. Upon receipt of the web page, the authentication module residing on the user's computer compares the identification in the page with the URL from which the web page was fetched. If the identification matches, the web page was served by its true owner. If the identifications do not match, the user is provided with an indication that the URL is not the true owner of the graphical images. For example, a "counterfeit" site may look just like the site that it was intended to look like because the counterfeiter can copy the page, including the graphical images. However, if the graphical images include a hidden identifier, the user can be notified that the page is "counterfeit."

An exemplary authenticity key is constructed in such a way that "freshness" can be determined, for example using a date/time stamp. The authenticity key will also include other identifying information as described later.



An exemplary authenticity key contains one or more hidden signature objects. In exemplary embodiments, the hidden signature object is a value that is the encoding of the following fields: web page hash, action, date/time, key identifier and digital signature. In exemplary embodiments, the web page hash is  
5 generating using SHA-1 on the entire web page excluding this hidden signature object. The Secure Hash Algorithm (SHA) was developed by the National Institute of Standards and Technology (NIST) and is specified in the Secure Hash Standard (SHS, FIPS 180). SHA-1 is a revision to SHA that was published in 1994. SHA-1 is also described in the ANSI X9.30 (part 2) standard. The  
10 algorithm takes a message of greater than 264 bits in length and produces a 160-bit message digest.

The action is a value used to specify the action to be performed by the browser plug-in that verifies this page. Preferably, if the user computer does not have the browser plug-in installed, the user will be informed of the required plug-  
15 in. Preferably, the user can elect to download the plug-in at the time the web page is received, in which case the web page can be displayed immediately after installing the plug-in. In exemplary embodiments if the user elects not to install the plug-in, the web page is displayed and the user is provided with an indication (e.g., a warning message displayed in a pop-up window) that the page was not  
20 authenticated. Actions are specified in a bit-wise manner so that multiple actions can be specified. For example, the action value may be defined to both display the security object (e.g., to display a bitmapped image) and to request a secure login.

The date/time field is used to specify the current date and time that the  
25 web page was delivered from the web server. This value is used by the browser plug-in to verify that the page is "fresh" (e.g., is not being replayed by a rogue site). The present invention may include a synchronization feature which allows the user's computer to synchronize its internal clock with atomic clocks available over the Internet. This would provide additional security by allowing a more  
30 precise verification of the date/time stamp.

The key identifier is used to identify the public key used to verify the signature. In exemplary embodiments, a digital signature is used as a salt value concatenated with an SHA-1 hash of the other four fields (web page hash, action, date/time and key identifier) that has been encrypted using the private key of the web Page server. A “salt value” is an arbitrary random value that constantly changes in order to minimize the possibility of various attacks.

In exemplary embodiments of the present invention, four keys are used in the web page authentication process: a private key, a public key, a master encryption key and a preferences encryption key. A private key (of the web page server) is used to create the “digital signature” within the web page signature. A digital signature is generally defined to include a certificate. For the purposes of the present invention, exemplary embodiments do not include a certificate. It will be appreciated that various embodiments can include a certificate in the digital signature. The private key is only distributed to applications requiring its use. A public key is buried in multiple pieces throughout the browser plug-in. The public key is used to verify the Digital Signature within the web Page signature. Although the public key itself can be distributed, its storage location should remain as obscure as possible to reduce the possibility of attacks. The master encryption key is also buried in multiple places in the browser plug-in. The master encryption key is used to encrypt the preferences encryption key that is stored on the user’s computer. The preferences encryption key that is stored on the user’s computer is used to encrypt preferences (e.g., user configuration information, such as appearance and location of authenticity stamp) that are stored on the user’s computer.

When the action indicates a Login, the browser plug-in's user display is displayed on the user's computer display with the secure word that will request the UserID and Password. These two values will be prefixed with the salt value and date/time information from the web page signature and encrypted using the public key. This information will then be sent by the plug-in performing the Submit. Preferably, the Submit explicitly references the URL to which the

information is to be sent. This will allow the information only to be sent to the destination that was previously signed within the web Page signature.

The preferences file is used to store information, such as a user's secure word. Preferably, the preferences file is placed in a random directory to help  
5 obscure the location of the preference file and facilitate the creation of unique user configurations. This increases the difficulty in creating a general purpose rogue program for extracting preferences and keys.

In exemplary embodiments, new keys are implemented through redistribution of the browser plug-in. The new plug-in can contain both the old  
10 and new keys to facilitate implementation of the new keys on a particular date.

In exemplary embodiments of the invention, the authentication module may contain a list of all known UserIDs. The list of known UserIDs can be displayed so that the user can select a desired UserID. Upon selection of a  
15 UserID, the user is prompted to enter a password. The UserID and password are encrypted with the use of the public key to authenticate the authenticity key. The entire string (e.g., [UserID][Password][original salt value]) is sent to the trusted server for verification. The trusted server 120 then extracts the UserID and password and forwards them to the authentication server 140 for verification.

Exemplary embodiments allow a user to check the validity of their  
20 authentication module. A server allows the authentication module to send a request for self-verification. In various embodiments, the validation is performed in response to a user request. In exemplary embodiments, the authentication module includes a suitable user interface which allows a user to request self-verification. The authentication module generates a random number ("salt") and  
25 encrypts it with the public key. The value is then sent to a known URL (e.g., a URL that is hard-coded in the authentication module). When the authentication module receives the request, it is decrypted using the private key and adding an additional salt value which is then returned to the client module (user). The client module decrypts the response received from the authentication module. The  
30 random values are then compared (without the additional salt added by the authentication module). If the value matches the value originally sent, the self-

verification is successful. A verification result is displayed to the user to indicate whether the verification was successful.

The present invention may be described herein in terms of functional block components, screen shots, optional selections and various processing steps. It should be appreciated that such functional blocks may be realized by any number of hardware and/or software components configured to perform the specified functions. For example, the present invention may employ various integrated circuit components, e.g., memory elements, processing elements, logic elements, look-up tables, and the like, which may carry out a variety of functions under the control of one or more microprocessors or other control devices. Similarly, the software elements of the present invention may be implemented with any programming or scripting language such as C, C++, Java, COBOL, assembler, PERL, or the like, with the various algorithms being implemented with any combination of data structures, objects, processes, routines or other programming elements. Further, it should be noted that the present invention may employ any number of conventional techniques for data transmission, signaling, data processing, network control, and the like. For a basic introduction of cryptography, please review a text written by Bruce Schneider which is entitled "Applied Cryptography: Protocols, Algorithms, And Source Code In C," published by John Wiley & Sons (second edition, 1996), which is hereby incorporated by reference.

It should be appreciated that the particular implementations shown and described herein are illustrative of the invention and its best mode and are not intended to otherwise limit the scope of the present invention in any way. Indeed, for the sake of brevity, conventional data networking, application development and other functional aspects of the systems (and components of the individual operating components of the systems) may not be described in detail herein. Furthermore, the connecting lines shown in the various figures contained herein are intended to represent exemplary functional relationships and/or physical couplings between the various elements. It should be noted that

many alternative or additional functional relationships or physical connections may be present in a practical electronic transaction system.

To simplify the description of the exemplary embodiments, the invention is frequently described as pertaining to an authentication system. It will be appreciated, however, that many applications of the present invention could be formulated. One skilled in the art will appreciate that the network may include any system for exchanging data or transacting business, such as the Internet, an intranet, an extranet, WAN, LAN, satellite communications, and/or the like. The users may interact with the system via any input device such as a keyboard, mouse, kiosk, personal digital assistant, handheld computer (e.g., Palm Pilot®), cellular phone and/or the like. Similarly, the invention could be used in conjunction with any type of personal computer, network computer, workstation, minicomputer, mainframe, or the like running any operating system such as any version of Windows, Windows NT, Windows2000, Windows 98, Windows 95, MacOS, OS/2, BeOS, Linux, UNIX, or the like. Moreover, although the invention is frequently described herein as being implemented with TCP/IP communications protocols, it will be readily understood that the invention could also be implemented using IPX, Appletalk, IP-6, NetBIOS, OSI or any number of existing or future protocols. Moreover, while the exemplary embodiment will be described as an authentication system, the system contemplates the use, sale or distribution of any goods, services or information over any network having similar functionality described herein.

The customer and merchant may represent individual people, entities, or business. The bank may represent other types of card issuing institutions, such as credit card companies, card sponsoring companies, or third party issuers under contract with financial institutions. It is further noted that other participants may be involved in some phases of the transaction, such as an intermediary settlement institution, but these participants are not shown.

Each participant is equipped with a computing system to facilitate online commerce transactions. The customer has a computing unit in the form of a personal computer, although other types of computing units may be used

including laptops, notebooks, hand held computers, set-top boxes, and the like. The merchant has a computing unit implemented in the form of a computer-server, although other implementations are possible. The bank has a computing center shown as a main frame computer. However, the bank computing center  
5 may be implemented in other forms, such as a mini-computer, a PC server, a network set of computers, and the like.

The computing units are connected with each other via a data communication network. The network is a public network and assumed to be insecure and open to eavesdroppers. In the illustrated implementation, the  
10 network is embodied as the internet. In this context, the computers may or may not be connected to the internet at all times. For instance, the customer computer may employ a modem to occasionally connect to the internet, whereas the bank computing center might maintain a permanent connection to the internet. It is noted that the network may be implemented as other types of  
15 networks, such as an interactive television (ITV) network.

Any merchant computer and bank computer are interconnected via a second network, referred to as a payment network. The payment network represents existing proprietary networks that presently accommodate transactions for credit cards, debit cards, and other types of financial/banking  
20 cards. The payment network is a closed network that is assumed to be secure from eavesdroppers. Examples of the payment network include the American Express®, VisaNet® and the Veriphone® network. In an exemplary embodiment, the electronic commerce system is implemented at the customer and issuing bank. In an exemplary implementation, the electronic commerce  
25 system is implemented as computer software modules loaded onto the customer computer and the banking computing center. The merchant computer does not require any additional software to participate in the online commerce transactions supported by the online commerce system.

The corresponding structures, materials, acts and equivalents of all  
30 elements in the claims below are intended to include any structure, material or acts for performing the functions in combination with other claimed elements as

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

## CLAIMS

What is claimed is:

- 1 1. A method for authenticating data, the method comprising:
  - 2 a. receiving a data request from a client;
  - 3 b. retrieving data based on the received data request;
  - 4 c. formatting the retrieved data, wherein the formatted data includes
  - 5 at least one authenticity key; and
  - 6 d. returning the formatted data to the client.
2. The method of Claim 1, wherein the formatted data is a web page.
- 1 3. The method of Claim 1, further comprising:
  - 2 a. reading the formatted data at the client;
  - 3 b. determining if the formatted data includes the at least one
  - 4 authenticity key;
  - 5 c. if the formatted data includes the at least one authenticity key;
  - 6 d. verifying authenticity based on the at least one authenticity key.
4. The method of Claim 3, further comprising displaying the data based on the verification of the at least one authenticity key.
5. The method of Claim 4, wherein one authenticity stamp will be displayed for data that has been successfully verified.
6. The method of Claim 4, wherein one authenticity stamp will be displayed for each graphical image.
7. The method of Claim 4, wherein a non-authenticity stamp will be displayed for data that has not successfully been verified.
- 1 8. A system for authenticating data, the system comprising:
  - 2 a. at least one client;



- 3           b.     at least one server;
- 4           c.     a network, wherein the client and the server communicate via the
- 5                 network; and
- 6           d.     at least one authentication server, wherein said at least one
- 7                 authentication server is in communication with said at least one
- 8                 server.

9.    The system of Claim 8, wherein said at least one client includes a browser, wherein pages are displayed to a user on a display device on said at least one client.

10.   The system of Claim 8, wherein said at least one server sends a page including an authenticity key to said at least one client.

11.   The system of Claim 10, wherein said at least one client verifies authenticity of the page based on the authenticity key.

12.   The system of Claim 11, wherein the page is displayed on said client, wherein the display includes an indication of the authenticity of the page.

1   13.   A system for authenticating data, the system comprising:

- 2           a.     at least one client;
- 3           b.     at least one server, wherein said at least one server sends a page,
- 4                 wherein the page includes at least one graphic image and wherein
- 5                 each of said at least one graphic images includes an authenticity
- 6                 key; and,
- 7           c.     a network, wherein the client and the server communicate via the
- 8                 network.

1   14.   In a computer system for authenticating data, a computer-readable

2           medium holding computer executable instructions for performing a method

3           comprising the steps of:

- 4 a. receiving a data request from a client;
- 5 b. retrieving data based on the received data request;
- 6 c. formatting the retrieved data, wherein the formatted data includes
- 7 an authenticity key; and
- 8 d. returning the formatted data to the client.

15. The computer system of Claim 14, wherein the formatted data is a web page.

1 16. The computer system of Claim 14, wherein computer executable

2 instructions further comprise the steps of:

- 3 a. reading the formatted data at the client;
- 4 b. determining if the formatted data includes the authenticity key;
- 5 c. if the formatted data includes the authenticity key;
- 6 d. verifying authenticity based on the authenticity key.

17. The computer system of Claim 16, wherein the computer executable instructions further comprise the step of: displaying the data based on the verification of the authenticity.

18. The computer system of Claim 17, wherein an authenticity stamp will be displayed for data that has been successfully verified.

19. The computer system of Claim 17, wherein a non-authenticity stamp will be displayed for data that has not successfully been verified.

## ABSTRACT

The present invention provides for an icon with an additional level of functionality that allows a user to validate that current information (e.g., a web page) originates from the true owner of the icon and is not merely a copy. The method includes a user requesting a web page from a web site using a web browser. The web server receives the request, retrieves the web page and forwards it to an authentication server. The authentication server inserts an authenticity key into the web page, then the page (including the authenticity key) is returned to the user. If the page includes an authenticity key, the authenticity is verified at the user's computer because the user computer includes logic (e.g., software) to verify the authenticity. During the user configuration process, the user defines an authenticity stamp which determines the format of an authenticated page.



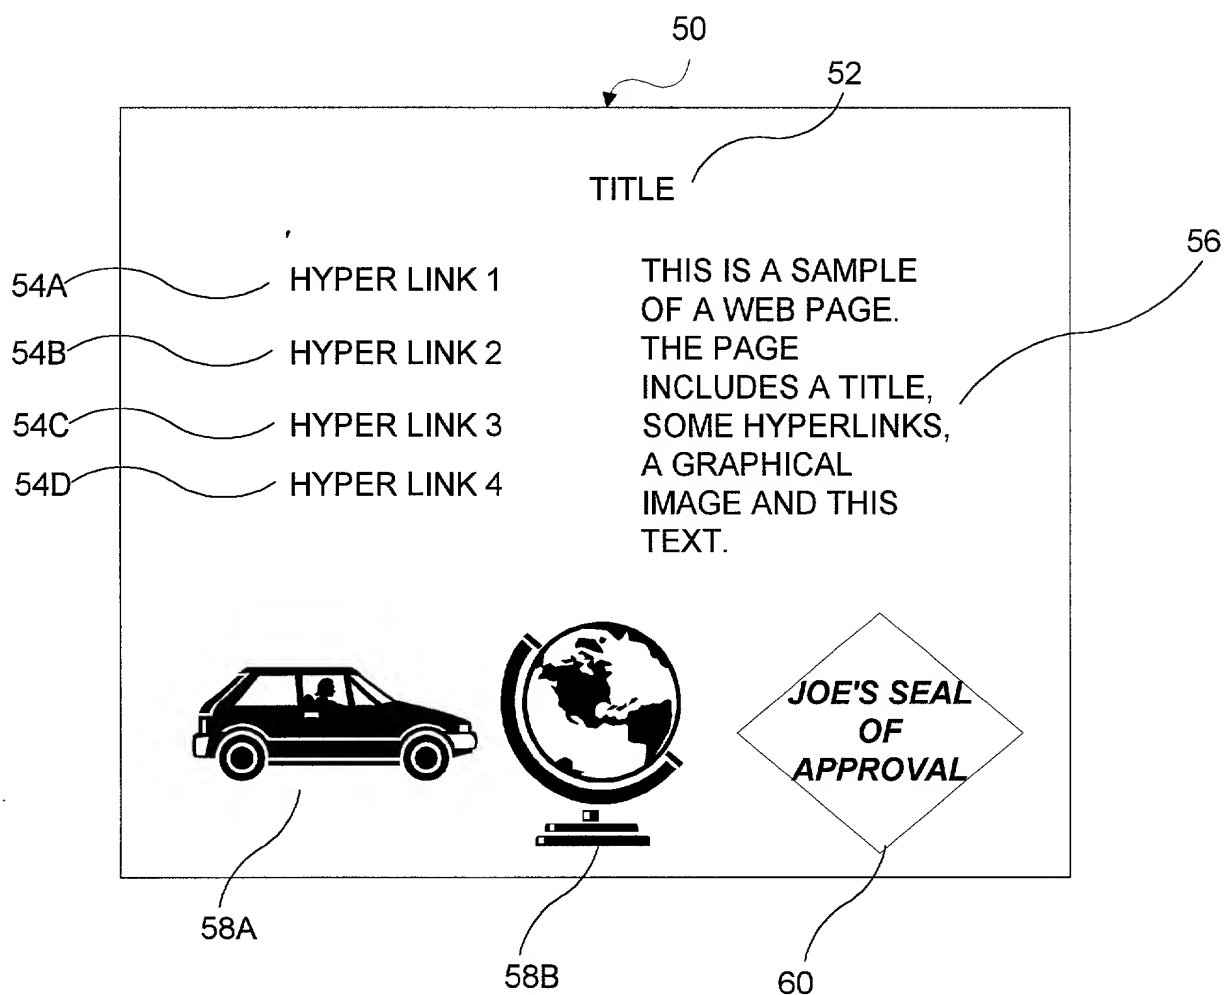


FIG. 2

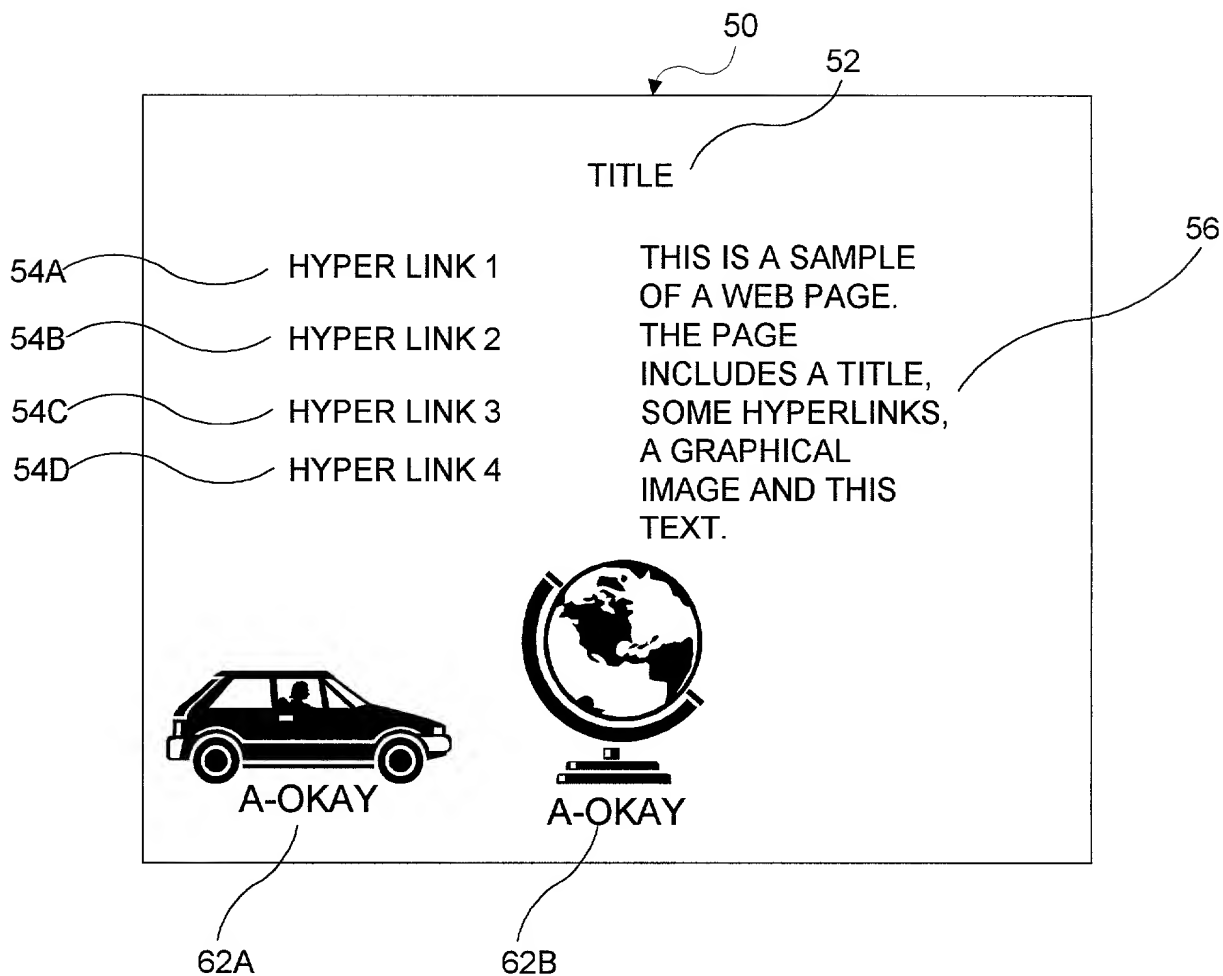


FIG. 3

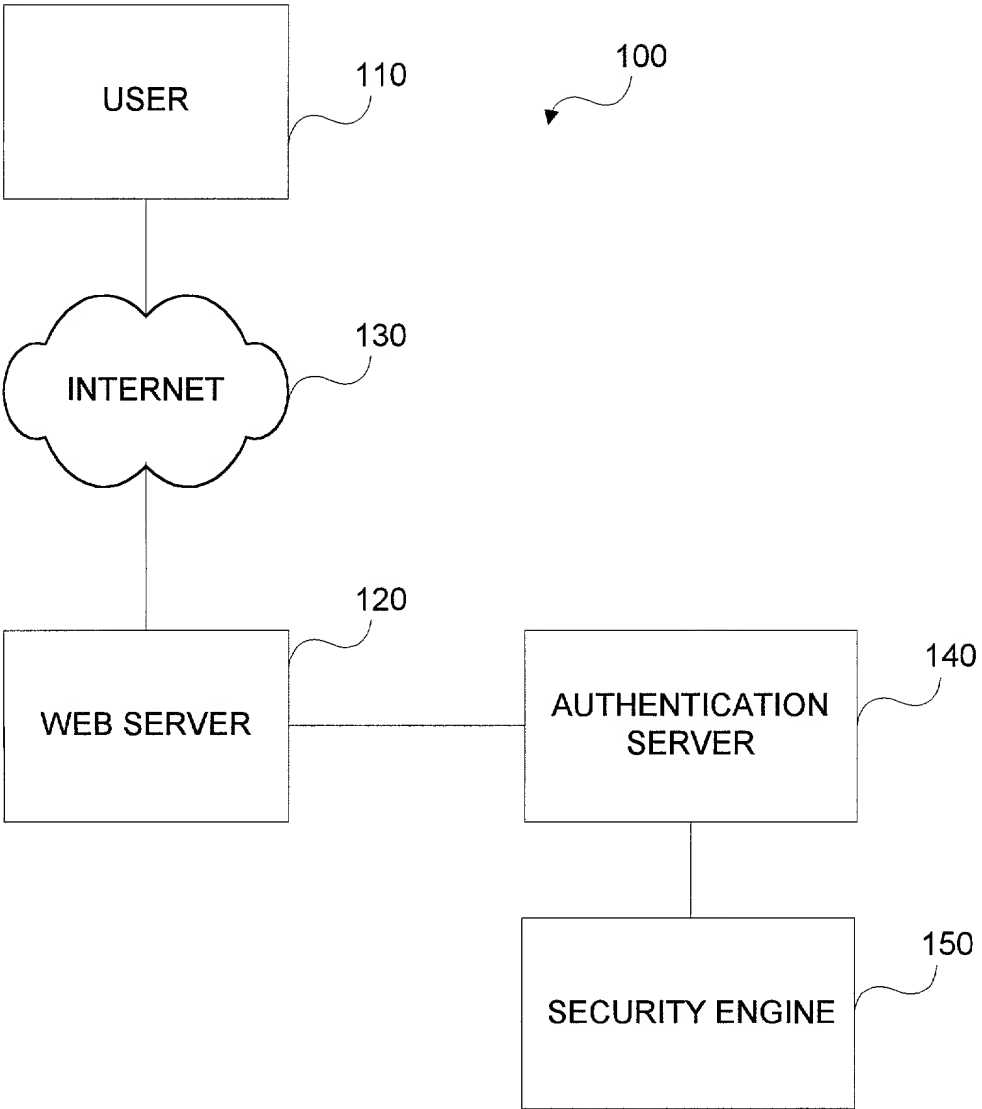


FIG. 4

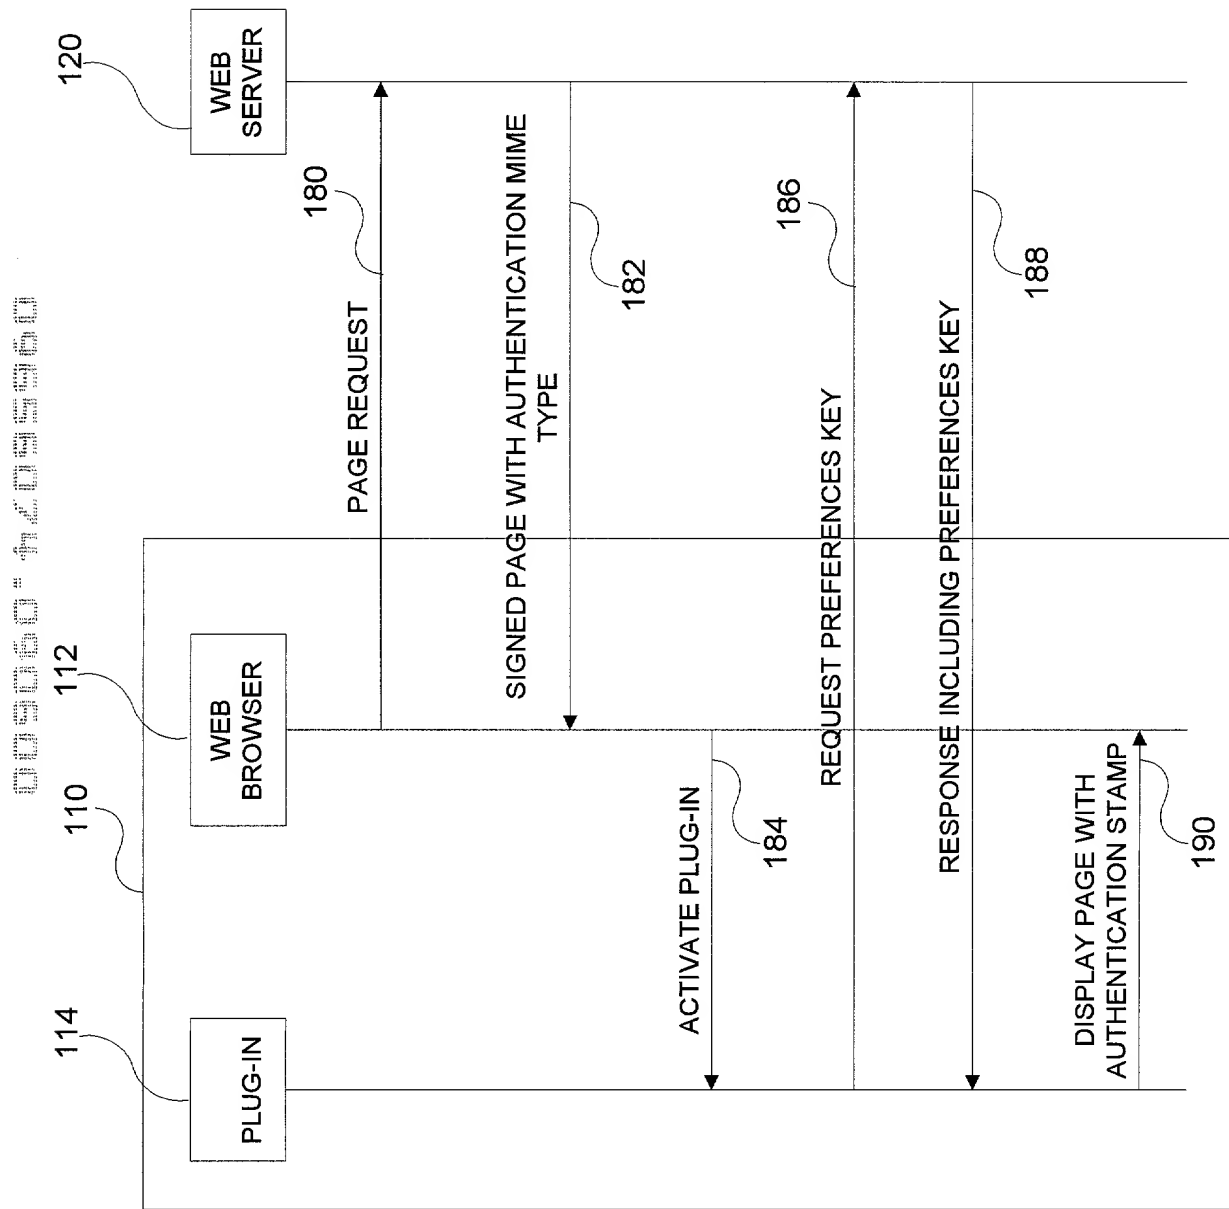


FIG. 5



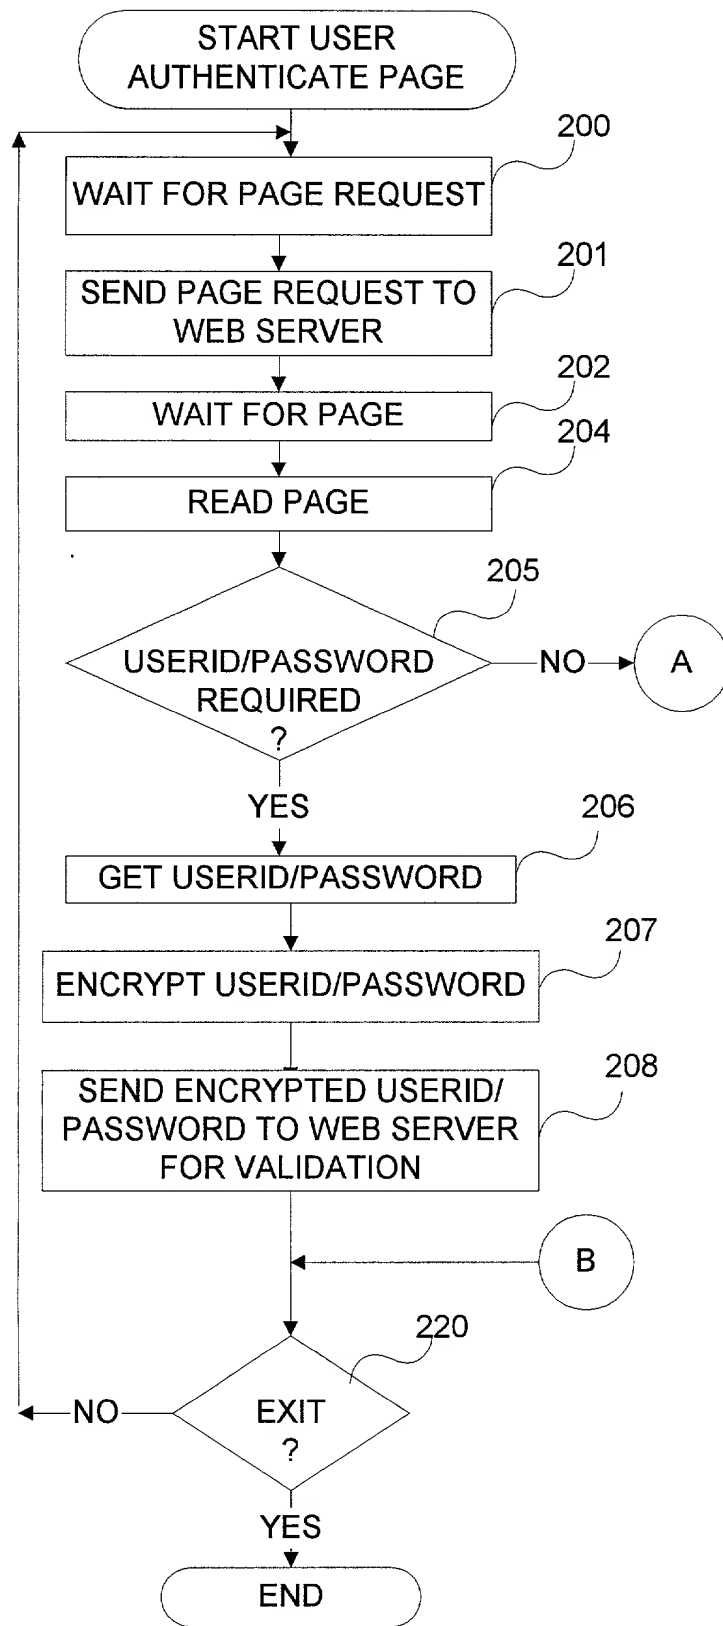


FIG. 6A



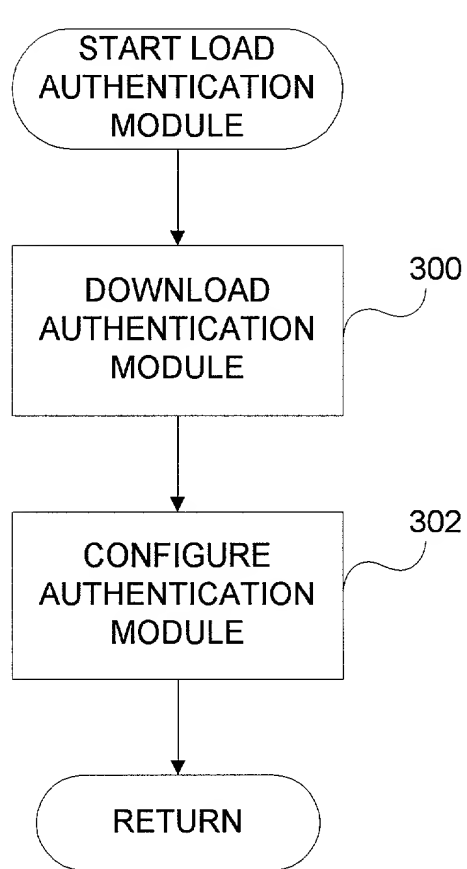


FIG. 7

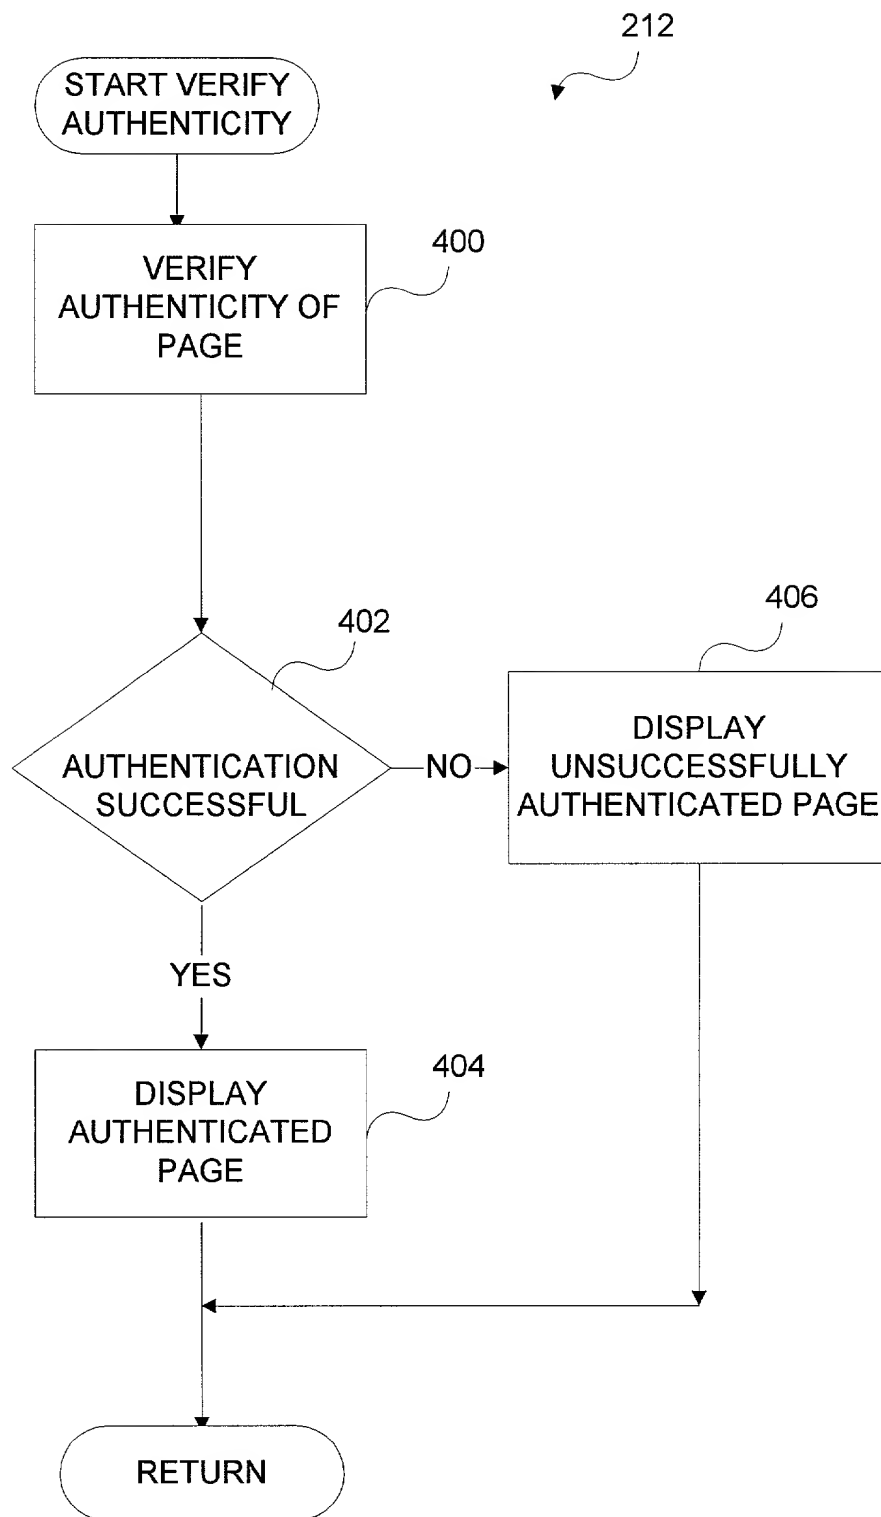


FIG. 8

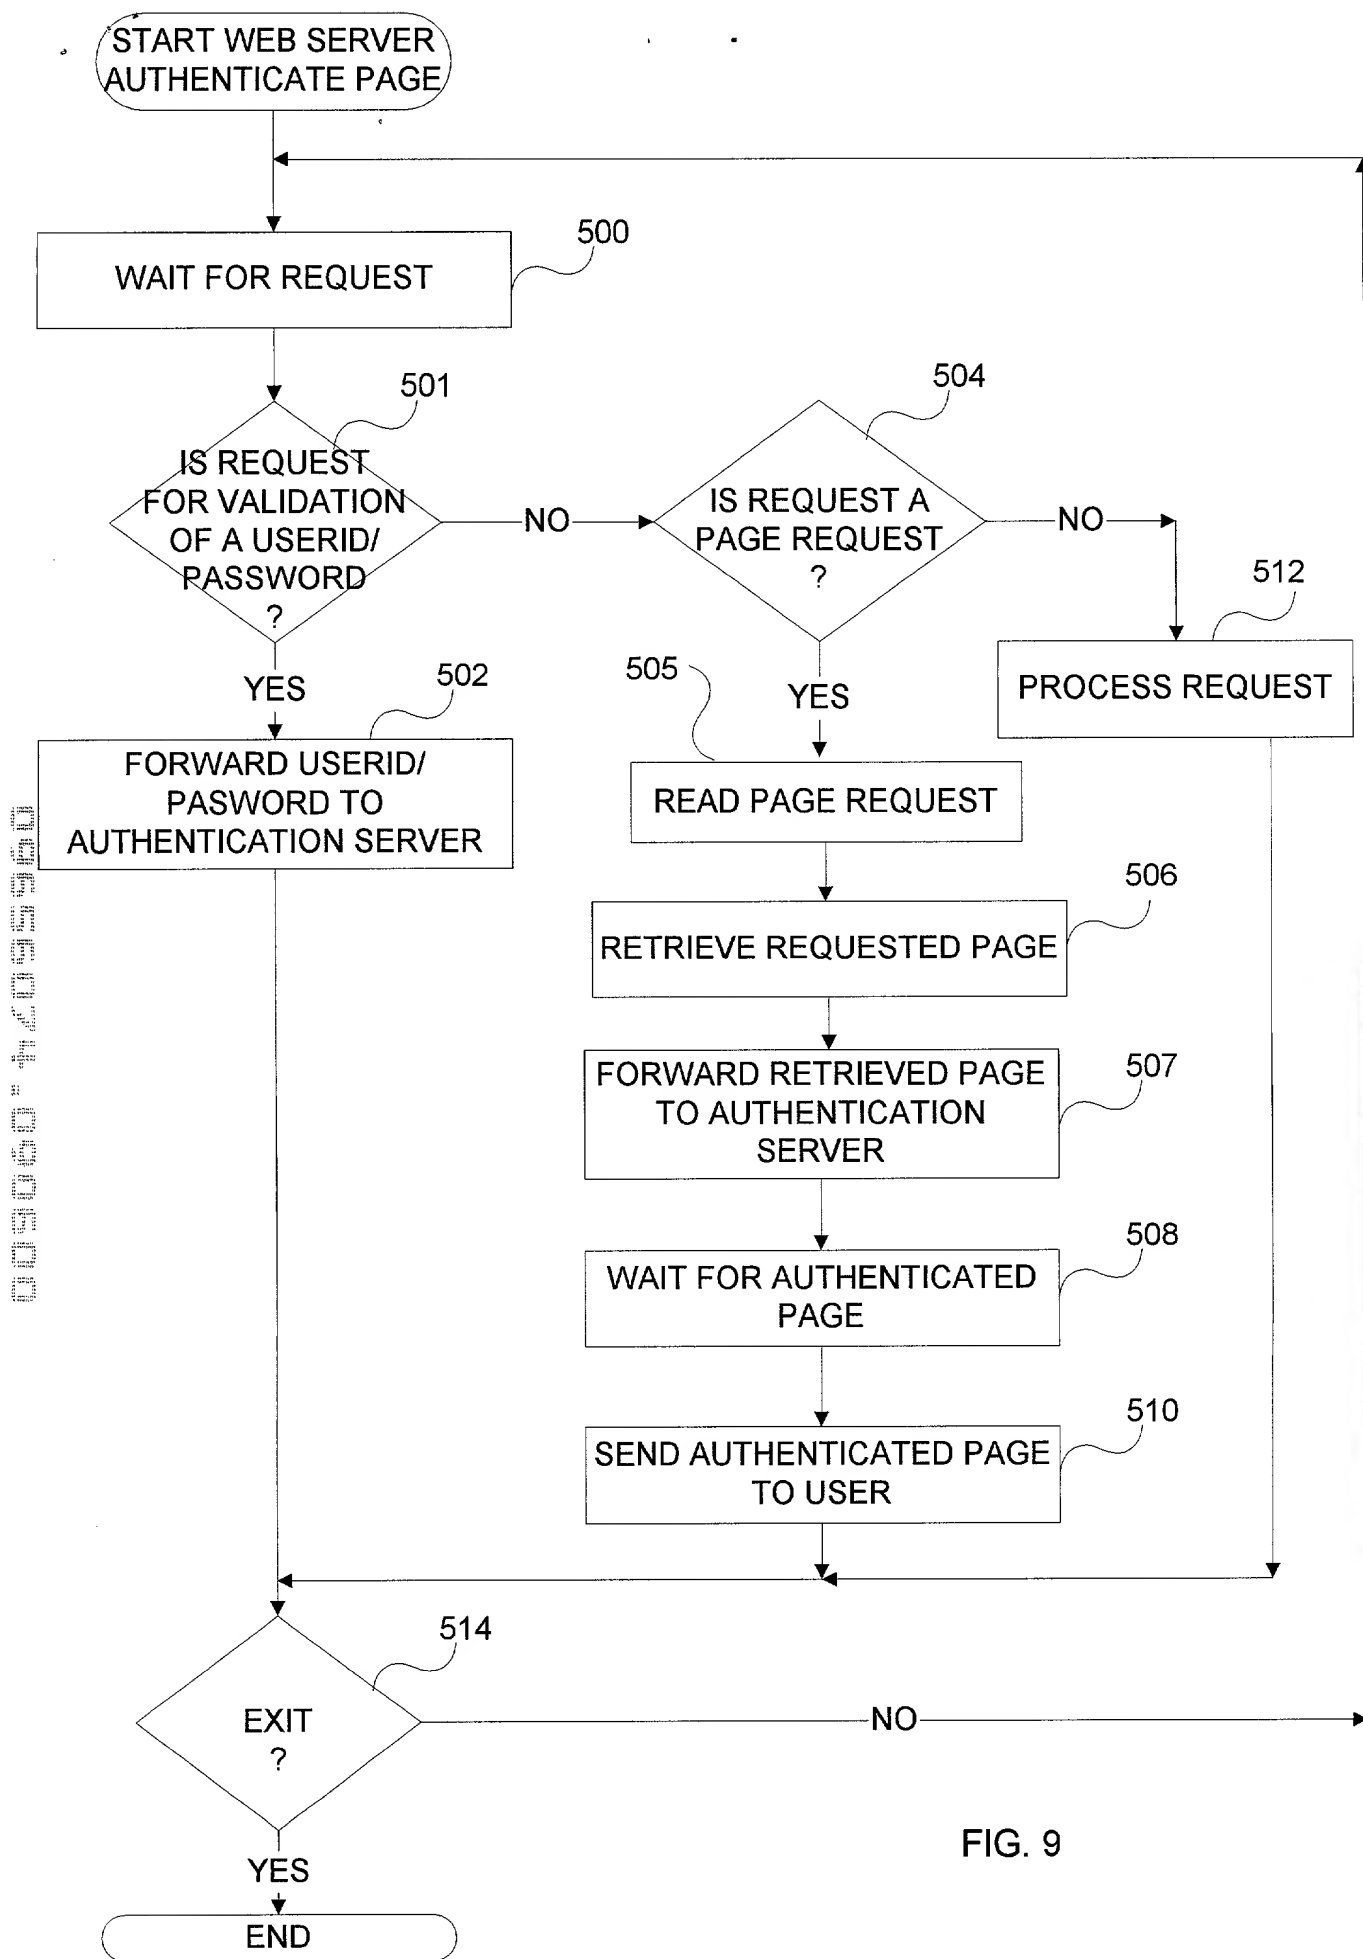


FIG. 9

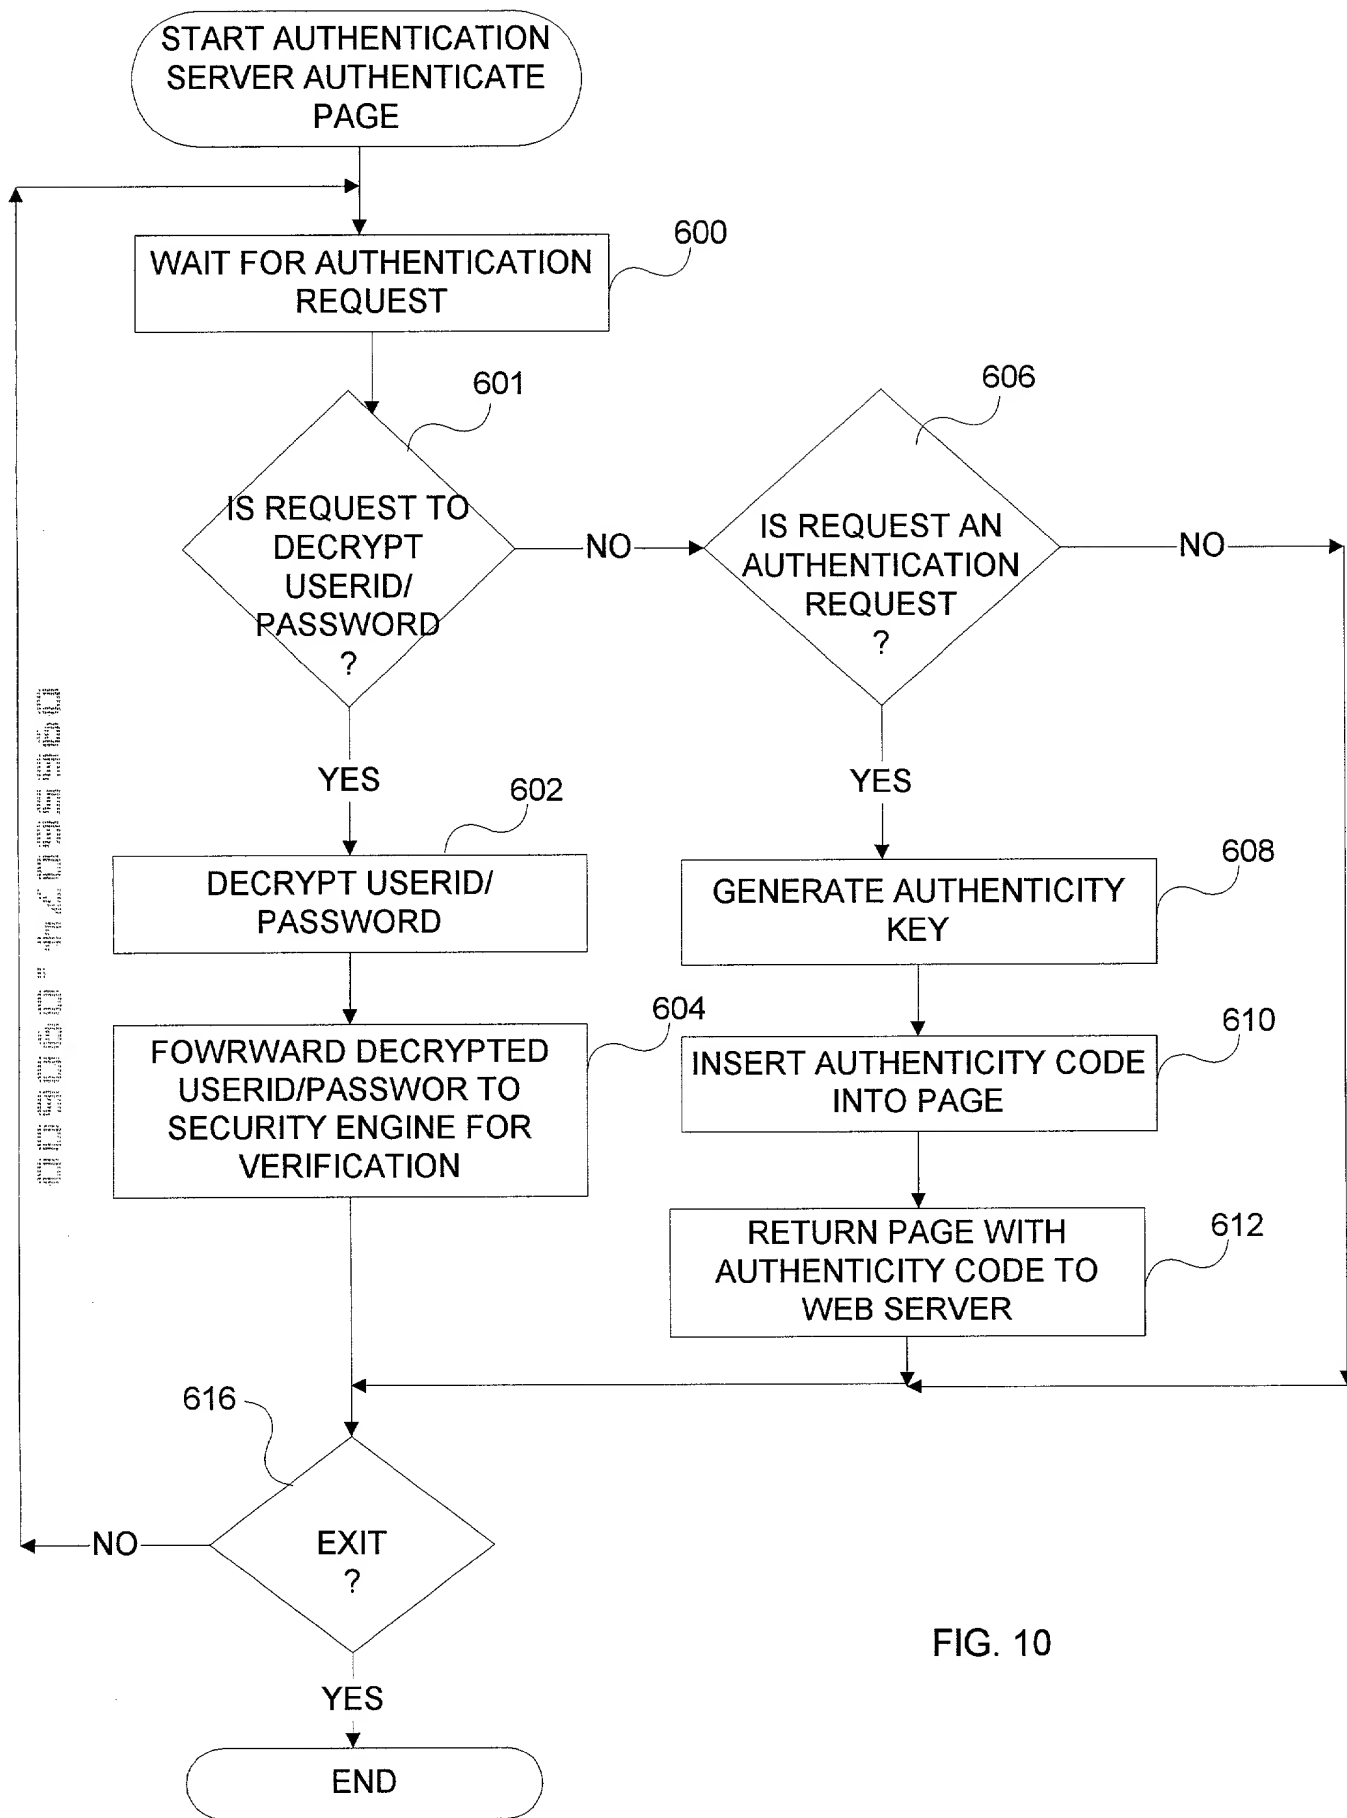


FIG. 10

<OBJECT ID="Checker" CLASSID="CLSID:B2157787-7492-11D4-8296-00609430A416"  
CODEBASE="APge.dll"  
SIGN="Tud9LuaH9v5QMQcHGUAMtDNhvZ3nGtUEHUMiGIsORV8v7JF9fp  
IBiq3Jod0SvdCqQxq+4DzXc  
SDK+5r6dbpJMTKiZQWLJpwNJJuJSS+cfywEXdQHxcOpRt8Hryi833Bg41s  
AIT+SCg5j7DBIzsvIVwohe  
chGYv5476AOavkoJrD4="></OBJECT>

FIG. 11